

Notes

- · All PDS480 units connected to switch by short CAT5 cables
- · All PDS480 units require 240VAC e to rack GPOs
- · Switch requires 240VAC to rack GPO
- LSM To be sited within 100m of rack network switch connected via Cat 5
- Leader cables exit from rear of PDS480 units to panels, not shown below. See Connection diagram for PDS assignment (TBD)
- All PDS480 units to be clearly labelled with PDS numbers shown below at front and rear of PDS unit
- · All leader cables to be clearly labelled with self laminating wrap around labels at both ends according to PDS assignment diagram (TBD)

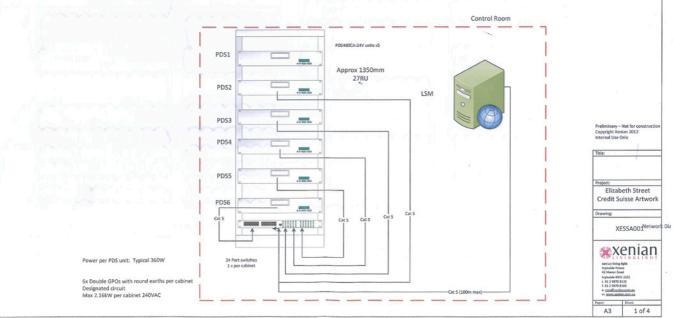

Wiring Layout as viewed from REAR of panels

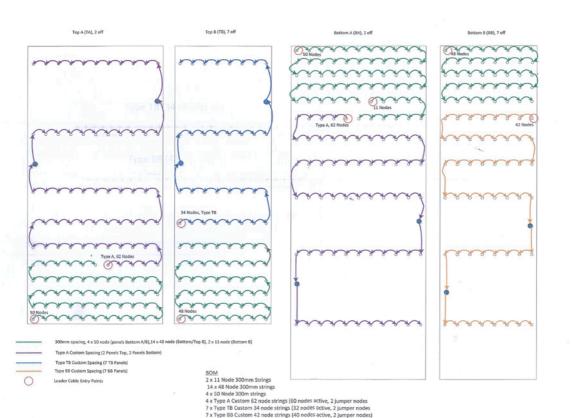

38 x 50ft leader cables

Preliminary - Not for construction Copyright Xenian 2012 Internal Use Only

Title:

String Layout

Elizabeth Street Credit Suisse Artwork

Drawing:

XESSA001


xenian living light ingleside House 42 Maror Road

Ingleside NSW 2101 1, 61 2:9970 8133 1.61 2 9970 8166 e. new@xenien.com.au w. www.senian.com.au

2 of 4

A3

---drawings and specifications are subject to change without notice --- all rights reserved ---

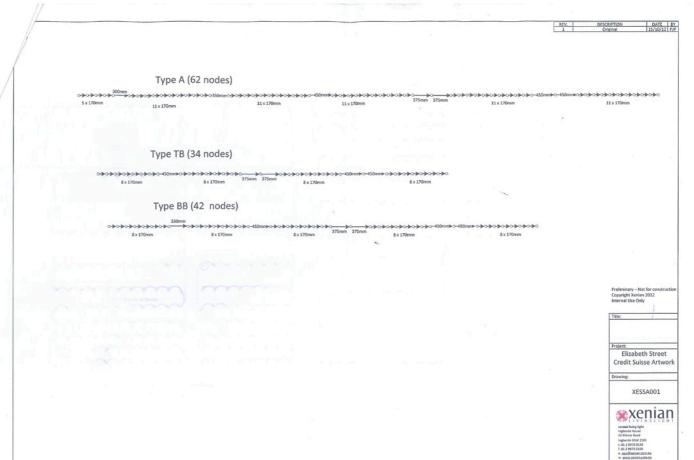

3 of 4

A3